




Holland

CITEX

Polyester Webbing Slings

CITEX Polyester Webbing Slings are made of strong polyester adhere to 7:1 safety factor and is manufactured according to BS 3481 Part 2 and it fulfils the S.W.L. (Safe Working Load) as stated on the label, which is attached to every sling





Technical Specifications			FLAT POLYESTER WEBBING SLINGS single ply STANDARD : BS : 3481 Part 2 SAFETY FACTOR : 7:1					
KGS	COLOUR	WIDTH	LOAD CAPACITIES IN KGS			LIFTING AT AN ANGLE β		
			100%	200%	80%	7° - 45°	45° - 60°	
500	VIOLET	1 inch	500	1000	400	700	500	
1000	GREEN	2 inch	1000	2000	800	1400	1000	
1500	YELLOW	3 inch	1500	3000	1200	2100	1500	
2000	GREY	4 inch	2000	4000	1600	2800	2000	
2500	RED	5 inch	2500	5000	2000	3500	2500	
3000	BROWN	6 inch	3000	6000	2400	4200	3000	
4000	BLUE	8 inch	4000	8000	3200	5600	4000	
5000	ORANGE	10 inch	5000	10,000	4000	7000	5000	
6000	ORANGE	12 inch	6000	12,000	4800	8400	6000	

Technical Specifications			FLAT POLYESTER WEBBING SLINGS double ply STANDARD : BS : 3481 Part 2 SAFETY FACTOR : 7:1					
KGS	COLOUR	WIDTH	LOAD CAPACITIES IN KGS			LIFTING AT AN ANGLE β		
			100%	200%	80%	7° - 45°	45° - 60°	
1000	VIOLET	1 inch	1000	2000	800	1400	1000	
2000	GREEN	2 inch	2000	4000	1600	2800	2000	
3000	YELLOW	3 inch	3000	6000	2400	4200	3000	
4000	GREY	4 inch	4000	8000	3200	5600	4000	
5000	RED	5 inch	5000	10,000	4000	7000	5000	
6000	BROWN	6 inch	6000	12,000	4800	8400	6000	
8000	BLUE	8 inch	8000	16,000	6400	11,200	8000	
10,000	ORANGE	10 inch	10,000	20,000	8000	14,000	10,000	
12,000	ORANGE	12 inch	12,000	24,000	9600	16,800	12,000	

ROUND SLING

- Protected with strong fabric;
- Available single cover and double cover;
- Manufactured according to EN 1492-2;
- With CE & GS Certificate issued by TUV.
- Safety Factor 7:1;
- Material 100% polyester;



CARGO LASHINGS

CITEX Cargo lashings are made of high strength polyester webbings and are suitable for almost every kind of transport. The width of the webbing is 25 mm, 50 mm, 75mm & 100mm both the ratchet and the webbing have a capacity of 1.5 Ton, 05 Ton, 08 Ton and 10 Ton respectively. The ratchet and fittings are made of the highest quality hardened steel.



Sizes Capacity


1" x 10 mtr	1.5 Ton
2" x 10 mtr	05 Ton
3" x 12 mtr	08 Ton
4" x 12 mtr	10 Ton

RING



H 5050D-3 H 8075D H 100100D H 2540O H 3050O

RATCHET

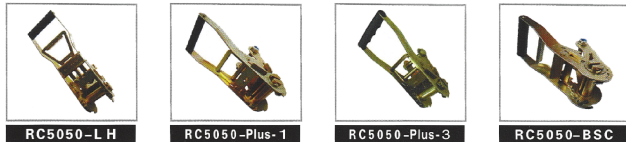


RC5050-LH RC5050-Plus-1 RC5050-Plus-3 RC5050-BSC

HOOK



H 2025F H 1050F H 3050F-1 H 3050F-2 H 3050F-3

HOOK

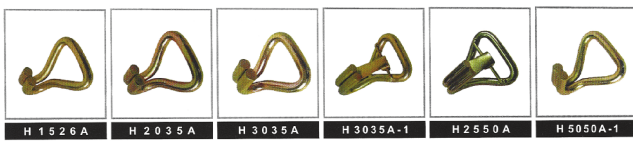

H 1526A H 2035A H 3035A H 3035A-1 H 2550A H 5050A-1


BUCKLE



OB 4015 CB 0625 CB 0635 CB 0935 CB 1235 CB 1250

POLYESTER WEBBING NET

Model	NETS0.9 x 1.3
Size	0.9m x 1.3m
Webbing width	35mm
LC	1000daN
Color	orange/other

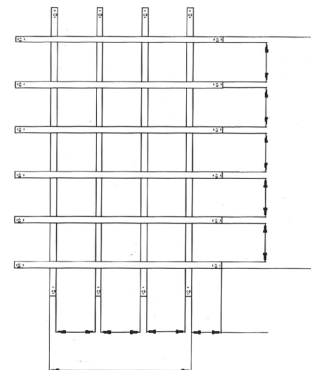

Move It designs and manufactures a wide variety of webbing nets for interior truck and trailer. These nets are tailored to fit each application resulting in a highly effective load securing system.